

h'ecoflex


Economical curved modular conveyor

Economic and quiet to convey and accumulate your wide products.

Made to fit your layout requirements, our h'ecoflex® conveyors are mounted and tested in our workshops.

The various accessories (feet, side guides, supports,...) are common to all our ranges.

- Economical curved plastic belt with 25 mm pitch, allowing multi-curve geometries
- Bending radii for compact geometries
- Very quiet operation
- Conveyor designed for quick and easy installation and maintenance
- Compact structure, small winding Ø
- Modularity to ease the evolution of the lines
- Conveyor widths 227 to 822 mm

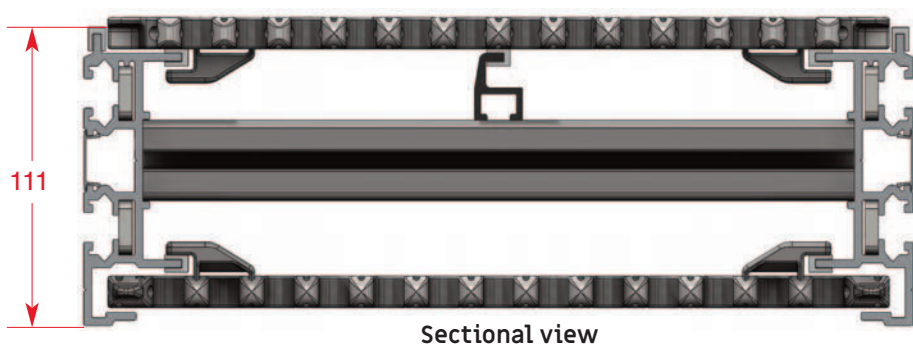

/ FEATURES:

Belt material:

- POM Natural / White or Blue
- PP Natural / White or Blue

Conveyor width = belt width + 17mm

Inner radius of curves : 1.4 to 1.8 x belt width

Winding Ø : 100mm

Speed : up to 40m / mn


Length : up to 15m depending on load and conveyor geometry

/ DIMENSIONS :


	Belt width	Conveyor width	Inner radius of curves	Medium radius of curves
HEF 2	210	227	291	396
HEF 3	292	309	441	587
HEF 4	394	411	641	838
HEF 5	497	514	841	1090
HEF 6	600	617	1026	1326
HEF 7	702	719	1241	1592
HEF 8	805	822	1451	1854




/ Optional equipment

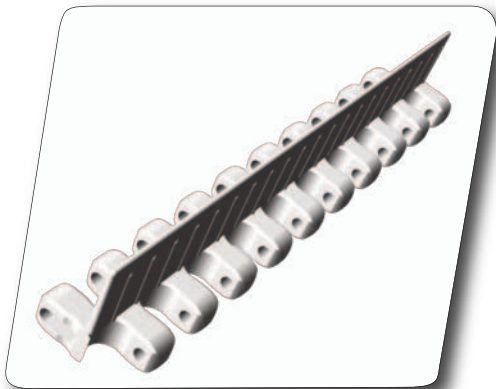


Lugs height 25, 50 or 75 mm

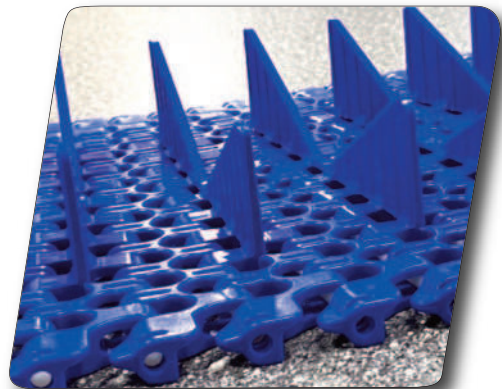

"V" shaped lugs

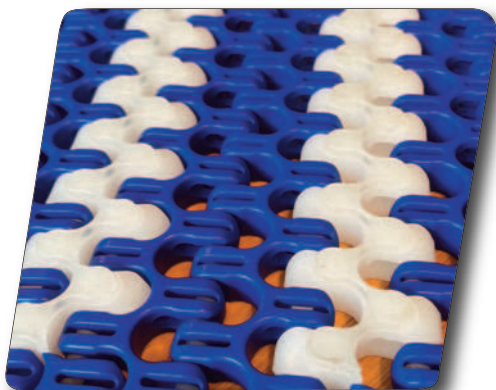


Anti-slips inserts

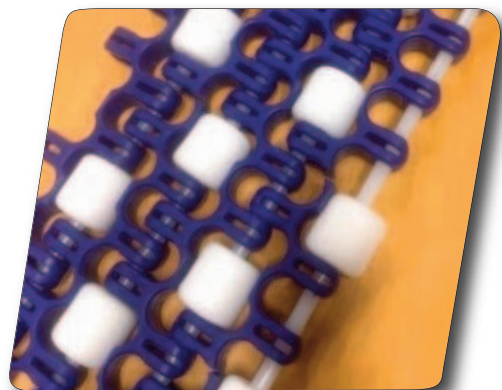


Loose rollers

FABER also means conveyors:

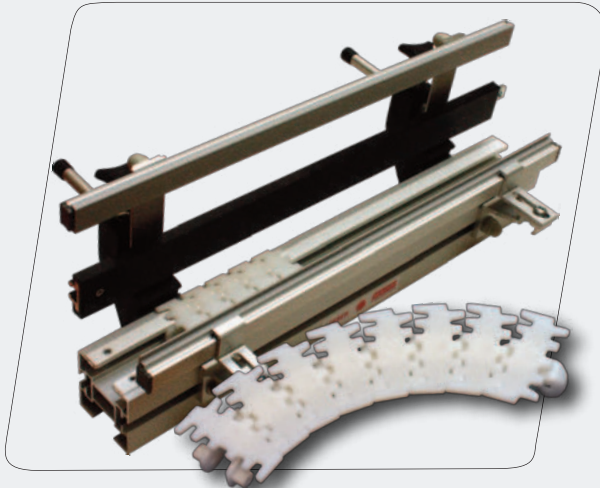


Flex
with curved chain

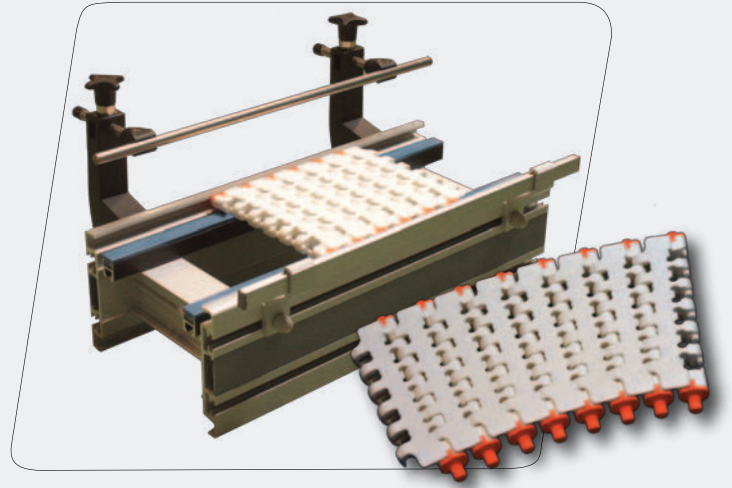

Flextoo
with curved modular belt



CAB and CAB-SB
with straight modular belt

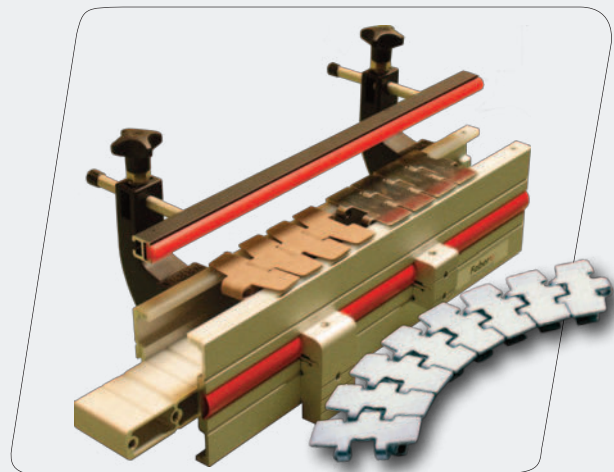

Robur
with straight or curved chain

ELCOM

1 rue Isaac Asimov
Z.A.C. La Maladière
38300 Bourgoin-Jallieu

8 avenue Louis Blériot
95740 Frépillon

FABER

Rue Henri Dunant
Z.I.
08140 Bazeilles

ZI de la Haie Griselle
94460 Boissy St Léger

info@faber.fr
www.faber.fr
Tél : 03.24.27.03.29

TRANSEPT

P.A. du Bois David
85300 Challans

6 Z.A. Les Sablons
27460 Alizay